


Czwórnik Orfs Rk2530

Liczba wariantów: 16

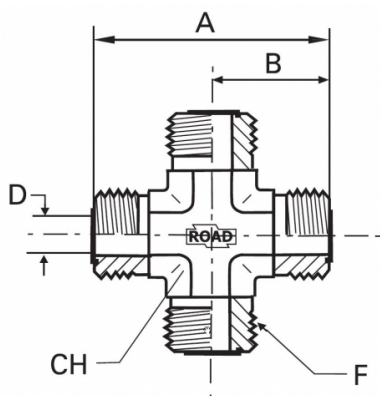

ZESKANUJ MNIE

Warianty produktu

Kod towaru	T Ø mm	T Ø cal	F	A mm	B mm	D mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2530-06	6	1/4	9/16-18	43	21,5	5	14	630	840
RK2530-08	8	5/16	11/16-16	50	25	6,5	19	630	840
RK2530-10	10	3/8	11/16-16	50	25	6,5	19	630	840
RK2530-12	12	1/2	13/16-16	56	28	9,5	19	630	840
RK2530-14	14	-	1-14	67	33,5	12,5	27	400	530
RK2530-15	15	-	1-14	67	33,5	12,5	27	400	530
RK2530-16	16	5/8	1-14	67	33,5	12,5	27	400	530
RK2530-18	18	-	1-3/16-12	75	37,5	15,5	30	400	530
RK2530-20	20	3/4	1-3/16-12	75	37,5	15,5	30	400	530
RK2530-22	22	-	1-7/16-12	83	41,5	20,5	36	400	530
RK2530-25	25	1	1-7/16-12	83	41,5	20,5	36	400	530
RK2530-28	28	-	1-11/16-12	89	44,5	26	41	250	330
RK2530-30	30	-	1-11/16-12	89	44,5	26	41	250	330

Kod towaru	T Ø mm	T Ø cal	F	A mm	B mm	D mm	CH mm	Ciśnienie robocze bar	Ciśnienie max bar
RK2530-32	32	1 1/4	1-11/16-12	89	44,5	26	41	250	330
RK2530-35	35		2-12	98	49	32	48	250	330
RK2530-38	38	1 1/2	2-12	98	49	32	48	250	330